




Ex. Libris

Louis Roeder

Editor, *The Trafalgar Chronicle*,
The 1805 Club

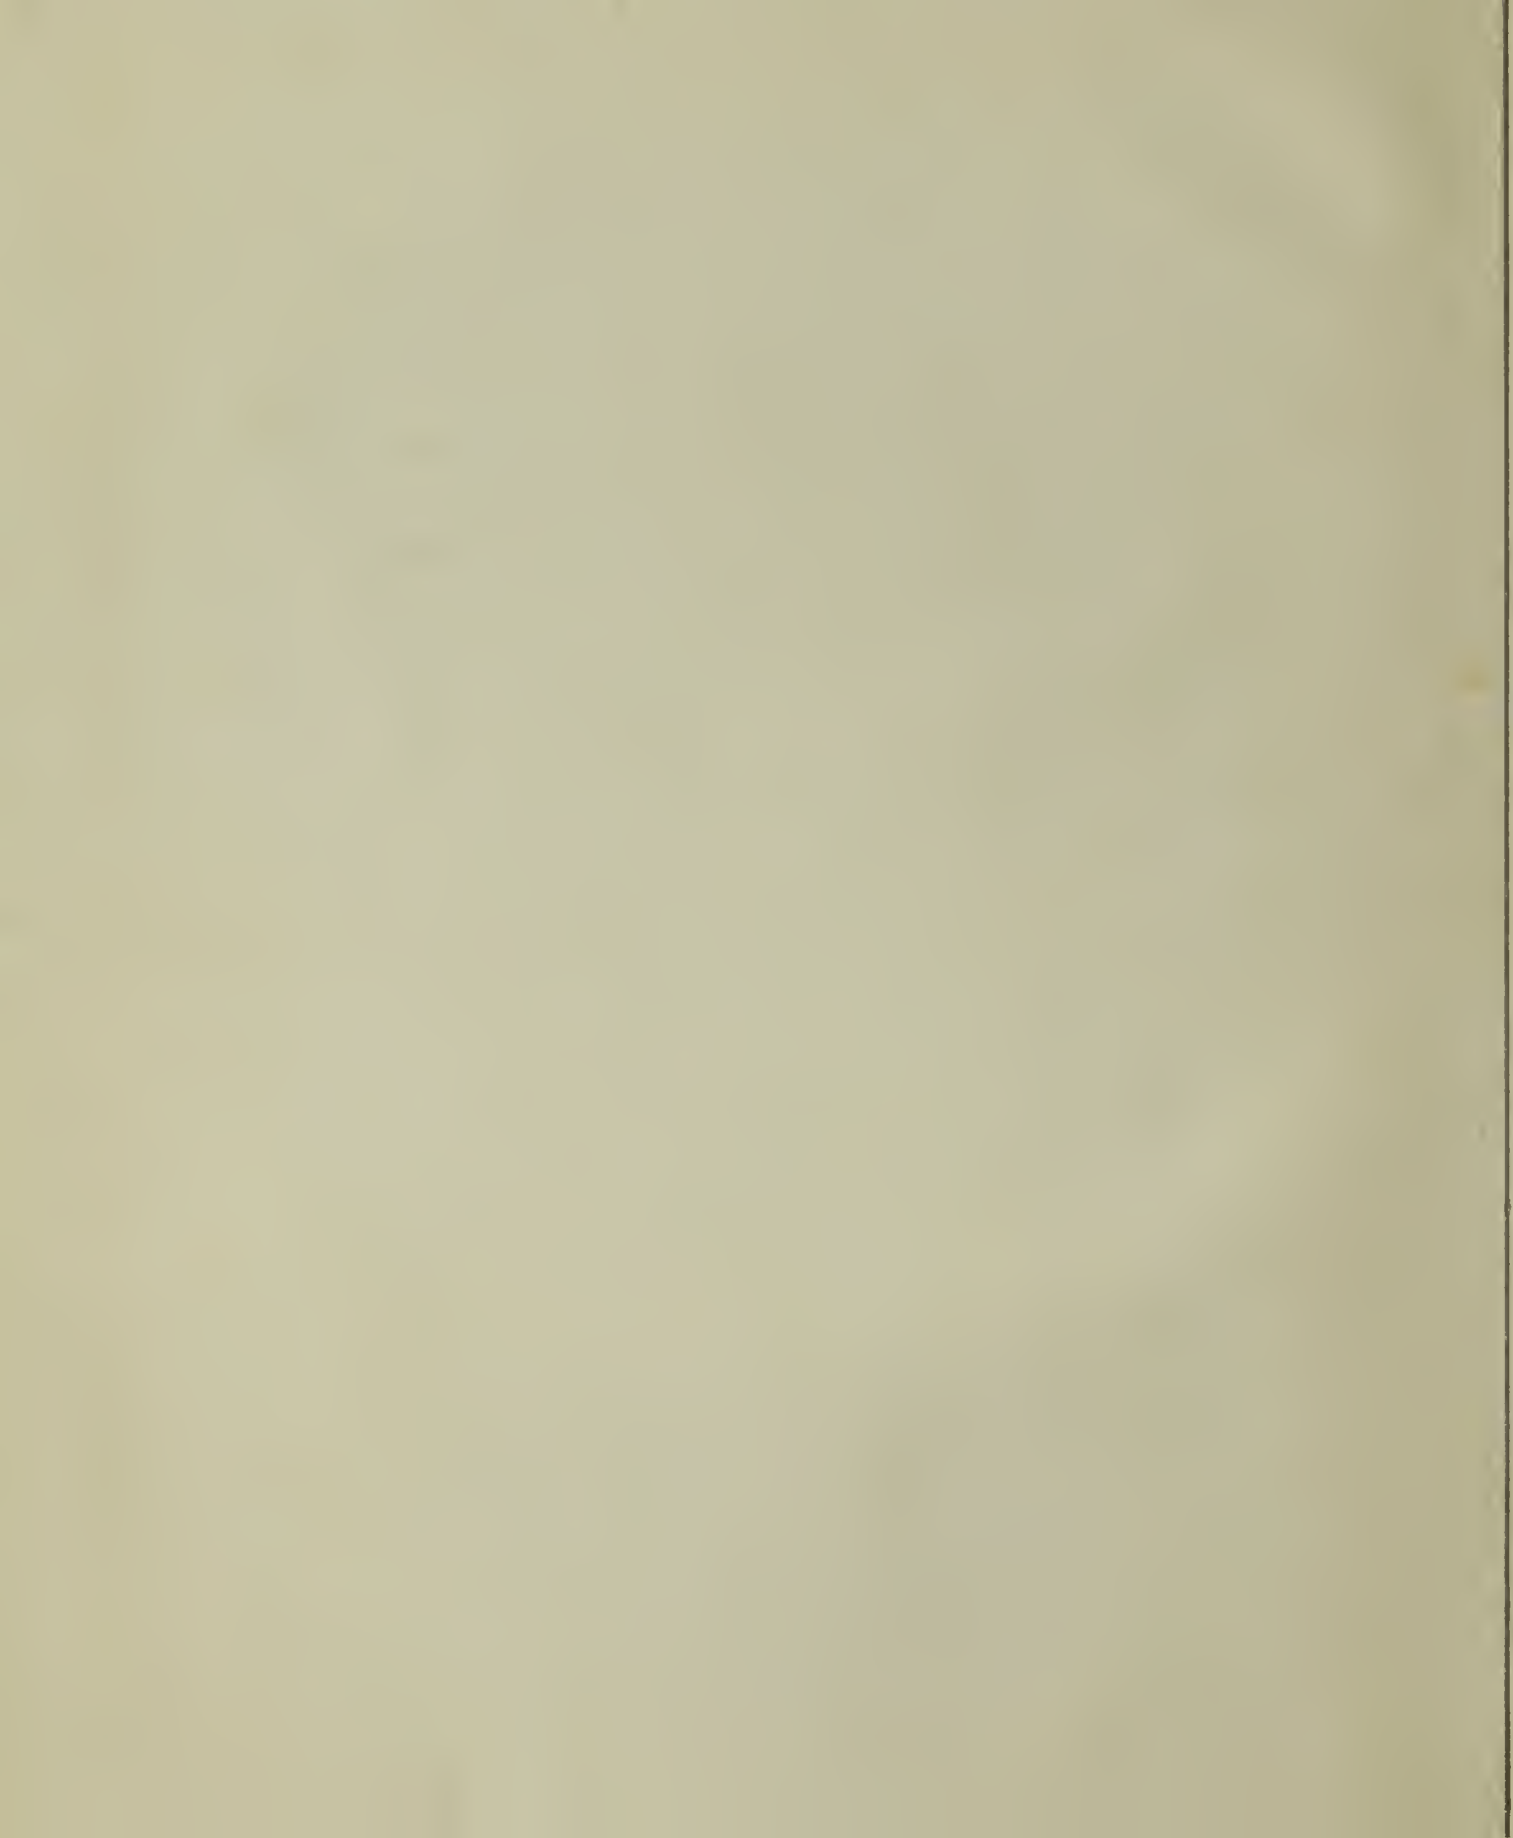

vm 57

.J65

1779x

FOLIO

DESCRIPTION

OF THE

NEW PATENT

STEERING MACHINE.

HC-2015-00

DESCRIPTION

OF THE

NEW SYSTEM

STEERING MACHINE.

TH E customary modes of steering Ships have been hitherto subject to numerous inconveniencies.

The Tiller, by its length, is not only cumbersome, but obstructs the Seaman in many necessary operations; particularly on board Ships or smaller Vessels where it is upon the upper or quarter Decks, the one half of which is thereby taken up.

In large Ships, the Tiller alone proving insufficient for the purpose, Ropes, Blocks and Pullies have been necessarily brought to its Aid. The Risque attendant on these in time of action with an Enemy, and under various other casualties incident to Shipping, is certainly worthy a serious attempt to remove.

In Merchant Ships, the Gun Room is generally so filled, that the Tiller has scarce room to traverse; and if by any accident the Tiller, Ropes, or Blocks, become damaged or deficient, it is a tedious and troublesome task to replace them with Others; and in the mean while, the delay must be dangerous, and may be fatal.

The space occupied by the Tiller and its Tackle, in the Gun Room, is desirable to the Merchant for the increase of his Freight; and, on that account, is, even at much hazard in the common mode, attempted to be filled. By the Method herein recommended, the Merchant will have this Space to use without Risque, and the Beams below the Cabin Deck may be pillar'd — a very needful precaution in arm'd Ships, to bear the
Weight

Weight of the Guns in that part where the heaviest are usually carried.— To Ships of War the Tiller, wherever placed, whether in the Gun Room, Cabin, or upon Deck, is a great Incumbrance: and the proportionable advantage derived from its removal, will be obvious to every Seaman.

How far the Patent Steering Machine will remove the before-mentioned inconveniences, and contribute to the ease, as well as the safety, of the Mariners and Vessel, we now submit to the judicious Navigator. To be found to have, in any degree, contributed to their safety, we shall deem our greatest merit; and therefore we flatter ourselves, that even the present attempt towards it will not be thought impertinent. Influenced by this Idea, we now venture to solicit the Consideration of all who are interested, or employed, in the management of Ships. Sensible of the Risque which every man runs who stakes his name on any new Invention, or Adoption, we have deferr'd recommending this machine to public notice, until in repeated trials we had justified Theory by Practice.

It has been used with success in a Ship of Four hundred Tons burthen, in the West India Trade, for four Years; during that time the Ship has made five voyages, and sustain'd many violent Gales of Wind: she was dismast'd in the Hurricane in the Leeward Islands 1776, her rudder broke, and her Bowspit sprung, yet the same Machine, first put up, remains to this hour perfect and intire, nor has it in any instance fail'd.

It stands also, in this case, a full proof of the Gain resulting from its use to the Owners of a Ship. The space in the Gun Room, which was formerly left for the Tiller and its Tackle, has, during the five Voyages above-mentioned, been filled with Merchandize, both outward and homeward bound, the Freight of which has already exceeded Three hundred Pounds Sterling.

The Figures 1, and 2, in the Plate, will give a general view of the whole Machine, which consists of very few parts. Ships are differently constructed, some have their stern posts almost perpendicular, others with a considerable Rake. The Steering Machine is so contrived, as to be alike applicable to all. In those whose Stern-posts rake, and where (on that account, or from other causes) the space abaft the rudder is not
suf-

sufficient for the Quadrant to traverse clear of the Stern, we use the Quadrant (B) with the Teeth on the inside of the Arch. It is let down on the head of the Rudder, nearly even with the upper edge of the upper mortice (1) cut for the Tiller; and being there securely wedged on, proves a hoop, or binding, to the Rudder Head.

The Quadrant is fixed so, as to form a Rectangle with the Stern-post, and have the same Centre with the Rudder.

The Pinion Wheel (i) and Spindle (b) are placed parallel to the Stern-post, and made to act on the Quadrant by a Wheel (a) fix'd on the Top of the Spindle, parallel to the Plane of the Quadrant, and turn'd by the Helmsman. The superior Power thus obtain'd, beyond that of the Tiller, &c. is evident to any Person conversant in Mathematical Calculation.

Every Inconvenience apprehended from the rising of the Rudder, is obviated in the construction of this Machine; the Spindle and Pinion-Wheel being exactly parallel to the Stern-Post, and consequently, to the Rudder, the Quadrant at Rectangle thereto, plays easily up and down, to the utmost bound the Rudder can possibly rise.

The Frame Work, supporting the Spindle when it is step'd on the upper Deck, is so constructed (as appears by the Plate, Fig. 1 and 2) to leave room, if at any time it was thought necessary, for a Tiller to be ship'd and to traverse below it. The same Provision is made, if the Spindle steps on the middle Deck, for a Tiller to be ship'd either in the Cabin or Gun-Room.

Experience has hitherto given no cause to suppose such Precaution necessary; it is however certain, that by adopting this Machine, great advantage and convenience may accrue, without lessening the Power of instantly applying, and using, the former mode of Tiller, &c. whenever it shall be judged proper.

This will be attain'd without removing the Machine, the Spindle being made to step in a Steel Socket, which Socket is set in an oblong
Frame

Frame, and wedged therein up to the Teeth of the Quadrant, to keep the Teeth of it, and the Pinion Wheel, true and close to each other. Such being their Situation, by only removing the Wedge, the Spindle falls back sufficiently to leave the Rudder free, and subservient to the sole agency of the Tiller.

Apprehensions therefore which might prevail against its use, with those who are scrupulous about leaving an old Path, are thus compleatly obviated; and it is plainly proved, that in furnishing them with additional Powers, and Accommodation, we do not deprive the Mariners of any that they enjoy'd before.

In the old method of steering with a Tiller, Ropes and Wheels, the action of the Helmsman is not immediately communicated to the Rudder, the Rope being more or less slack must be hove taught before any effect can be produced by the Tiller; but, in the Patent Steering Machine, the Motion is instantly communicated by the slightest touch of the Helmsman's Hand.

The Index (g) placed immediately below the Horizontal Wheel (a), moving between the Sheaves (n n) shews the Helmsman the exact Position of the Rudder; and the Steerage becomes at once quick, easy, and certain.

The Tiller in its action shoves the Rudder from the Stern Post, and is, consequently, a strain on it, as well as on the Googings and Pintles; but the Quadrant and pinion wheel, as we have placed them, act in aid of all, being like a Shoar or Support to the Rudder in every Position; and keeping the motion of the Pintles in the Googings, true, equal and regular, prove in fact another more powerful Brace.

Should any one object to the supposed Bulk of the *foremost* Machine, if the Quadrant is placed in the Cabin; let it be observed, that it only extends two feet and a half, or three feet from the Rudder, even in Ships of 500 Tons burthen; and proportionably less in smaller vessels. It may be neatly cas'd into the Form of a Cabin Table, equally as convenient and useful as any other Table.

But,

But, in Ships where the Stern-post is nearly perpendicular, and where there is sufficient room abaft the Rudder for the Quadrant (A) with its Pinion Wheel clear of the Stern; the Quadrant is applied with its arch towards the Stern, the Center of which being (as described before) exactly over, or in a line with, the Center of the Pintles, it occupies very little Space, whether placed in the Cabin, Gun Room, or upon the upper Deck; and, like the other, is equally applicable to either: having then the Teeth on the outside of the Arch, it gives the same aid in support of the Rudder, and adds strength to the Pintles and Googings.

The whole Apparatus can be fix'd, in any Ship, on twelve or fourteen Days previous Notice, at a very easy expence, which one voyage will amply repay.

We have thus given a plain description of this Machine; and Models of it, in both Forms, may be seen at any Time. The candid Examination of its Powers and Conveniencies, the Compactness of its Form, and, above all, the Simplicity of its Construction, we flatter ourselves will soon recommend it to general Use.

Bishopsgate-street,
August, 1779.

Thomas William Jolly.
Robert Beatty.

REFERENCES to the PLATE.

Figure 1 Exhibits the Quadrant applied with its Arch abaft the Rudder.

Figure 2 Exhibits the Quadrant applied with its Arch before the Rudder.
a the Horizontal Wheel.

b the Spindle.

c, d, e, f, the Frame.

g the Index, and n n the Sheaves.

h the Quadrant.

i the Pinion Wheel.

k the Rudder Head.

l the Mortice for the Tiller.

m the place of the Socket.

Figure 3 exhibits a side view of the Machine, and the several Parts separate.

A the Quadrant with the Teeth on the outside of the arch.

B the Quadrant with the Teeth on the inside of the arch.

C the Socket.

D the Socket Frame.

E the Wedge.

F the Pinion.

G the Spindle.

Fig. 3

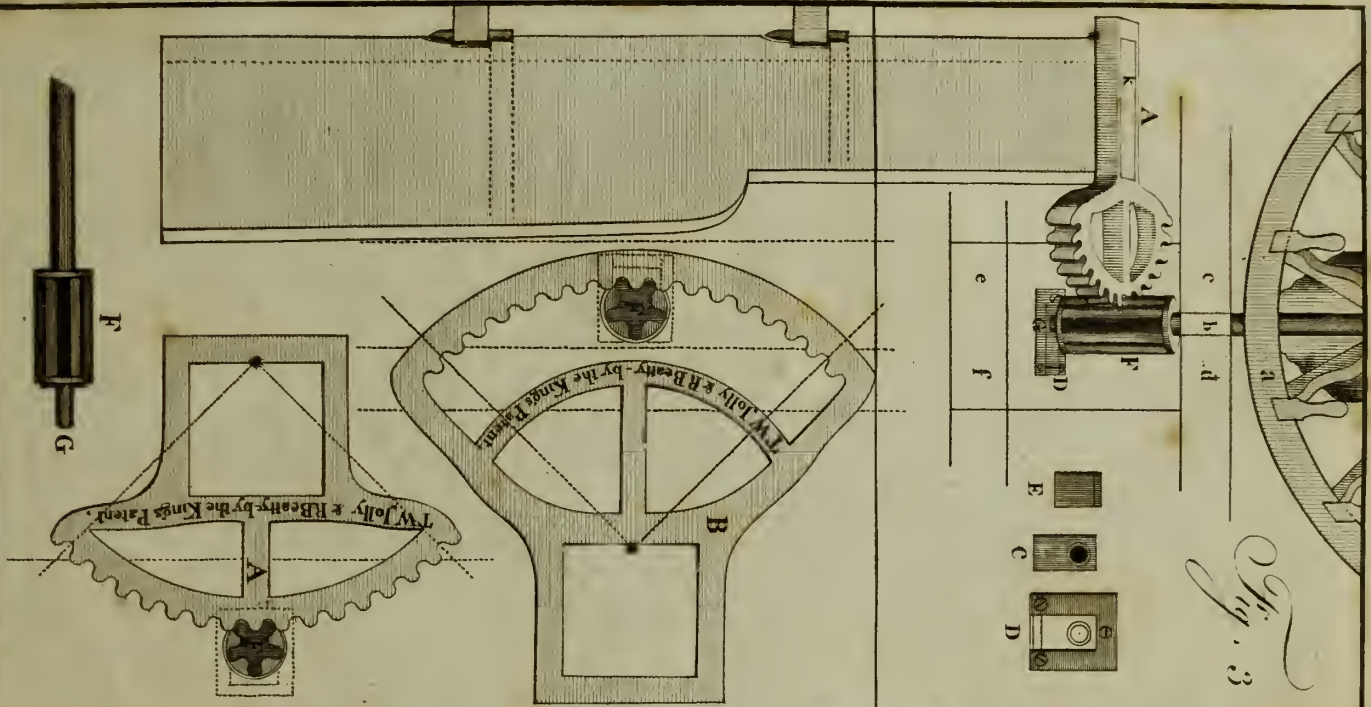


Fig. 1

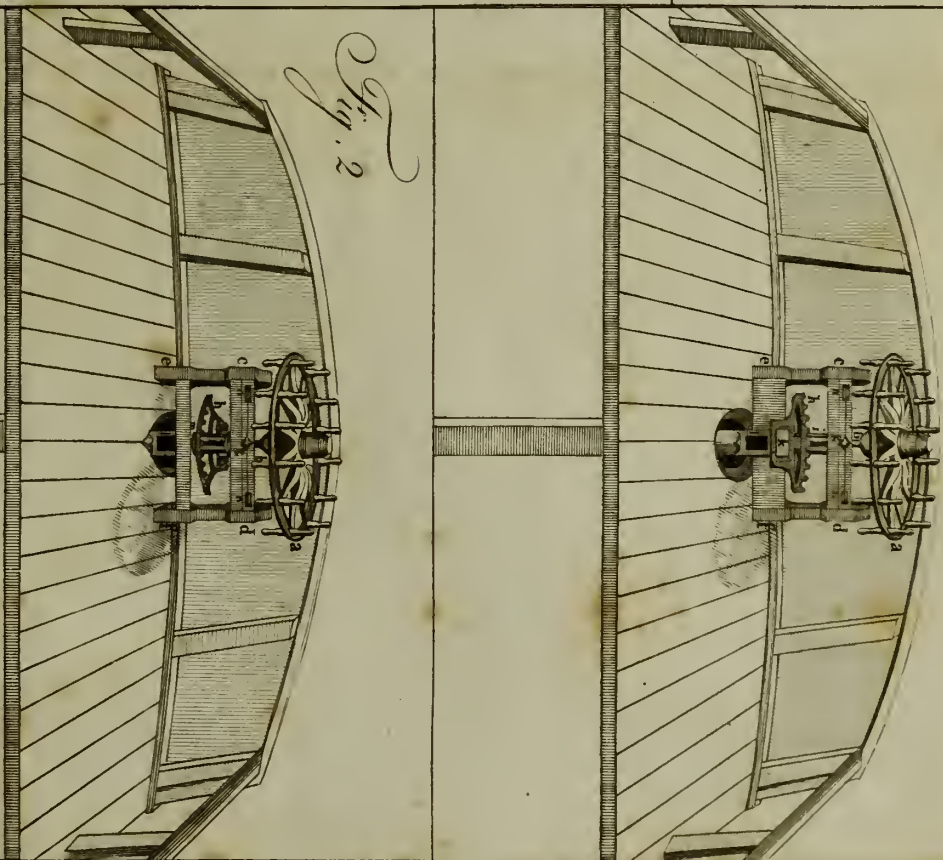


Fig. 2

